




FEATURES

- Enables the machine to be utilized for loading and stacking.
- Various fork length options available to reduce possible damage when stacking.
- Supplied with certification (lift governed by machine capability).

Part Number	506C	508C	520-50	520-40	524-50	527-55
330/71707	•	•				
330/71708	•	•				
330/71709	•	•				
330/71710	•	•				
330/71711	•	•				
328/00849			•			
514/00200			•			
328/00066			•	•	•	•
514/00700			•	•	•	•
296/02244				•		
296/12034					•	•
296/12045					•	•
328/00898			•	•	•	•
328/00649					•	•

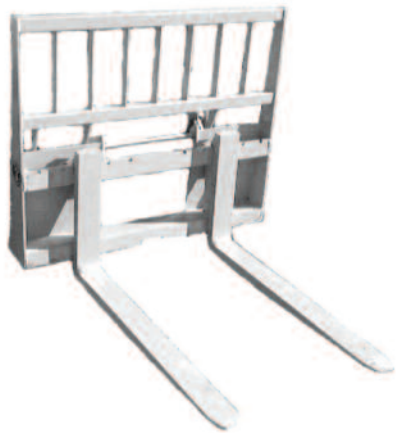

Part Number	531-70/ (T)	541-70T	535-140	550-140	550-170	531-70 Agri	536-60 Agri/ Plus	541-70 Agri Plus
330/71421	•	•	•	•	•	•	•	•
330/71437	•	•	•	•				
330/71509	•	•	•	•	•	•	•	•
330/00037	•	•	•	•				
545/40800	•	•	•	•	•	•	•	•
328/01024		•						

Part Number	Style	Width	Fork Shaft	Fork Length	Fork Travel	Rotation (each side of center)	Swing (each side of center)	Capacity (lb)	Load Center
330/71707	Float	48"	2.25"					10000	
330/71708	Float	66"	2.25"					8000	
330/71709	Tilt	48"	2.25"			10°		8000	
330/71710	Tilt	66"	2.25"			10°		6000	
330/71711	Shift	66"	2.25"				4"	8000	
328/00849	Float	42"	1.75"	42"				2200	20"
514/00200	Float	42"	1.75"					2200	
328/00066	Tilt	48"	1.75"			10°		5000	
514/00700	ITA	42"						4100	20"
296/02244	Float	42"	1.75"	42"				4000	20"
296/12034	Float	51"	2"	42"				6000	20"
296/12045	Float	51"	2"	47"				6000	20"
328/00898	Shift	48"					4"	5500	
328/00649	Fork Positioning	48"		48" (ITA)	32"			6000	24"
330/71421	Tilt	48"	2.25"			10°		10000	
330/71437	Tilt	66"	2.25"			10°		10000	
330/71509	Shift	48"	2.25"				4"	10000	
330/00037	Shift	66"	2.25"				4"	10000	
545/40800	ITA	60"						8800	
328/01024	Fork Positioning	48"		48" (ITA)	32"			10000	24"

\* Lifting capabilities refer solely to the attachment load capacity. Refer to machine spec sheets for machine lifting capabilities